

Article

Inventory of PCBs in Chicago and Opportunities for Reduction in Airborne Emissions and Human Exposure

Caitlin E. Shanahan, Scott Spak, Andres Martinez, and Keri C. Hornbuckle

Environ. Sci. Technol., **Just Accepted Manuscript** • DOI: 10.1021/acs.est.5b00906 • Publication Date (Web): 06 Oct 2015Downloaded from <http://pubs.acs.org> on October 21, 2015

Just Accepted

"Just Accepted" manuscripts have been peer-reviewed and accepted for publication. They are posted online prior to technical editing, formatting for publication and author proofing. The American Chemical Society provides "Just Accepted" as a free service to the research community to expedite the dissemination of scientific material as soon as possible after acceptance. "Just Accepted" manuscripts appear in full in PDF format accompanied by an HTML abstract. "Just Accepted" manuscripts have been fully peer reviewed, but should not be considered the official version of record. They are accessible to all readers and citable by the Digital Object Identifier (DOI®). "Just Accepted" is an optional service offered to authors. Therefore, the "Just Accepted" Web site may not include all articles that will be published in the journal. After a manuscript is technically edited and formatted, it will be removed from the "Just Accepted" Web site and published as an ASAP article. Note that technical editing may introduce minor changes to the manuscript text and/or graphics which could affect content, and all legal disclaimers and ethical guidelines that apply to the journal pertain. ACS cannot be held responsible for errors or consequences arising from the use of information contained in these "Just Accepted" manuscripts.



ACS Publications

Inventory of PCBs in Chicago and Opportunities for Reduction in Airborne Emissions and Human Exposure

AUTHOR NAMES. Caitlin E. Shanahan ^{†^}, Scott N. Spak^{*†‡}, Andres Martinez[‡], Keri C. Hornbuckle[‡]

AUTHOR ADDRESS.

^{*} Public Policy Center, The University of Iowa, 223 South Quadrangle, Iowa City, IA, 52242-1192, 319-335-9993, scott-spak@uiowa.edu


[†] School of Urban and Regional Planning, The University of Iowa, 345 Jessup Hall, Iowa City, IA, 52242-1316, United States;

[‡] Department of Civil and Environmental Engineering & IIHR-Hydrosience and Engineering, The University of Iowa, Iowa City, IA 52242-1316, United States

[^]Now: Wisconsin Emergency Management, 2400 Wright St., P.O. Box 7865, Madison WI, 53707-7865, United States

KEYWORDS: polychlorinated biphenyls, semi-volatile organic compounds, policy, remediation

GRAPHICAL TOC

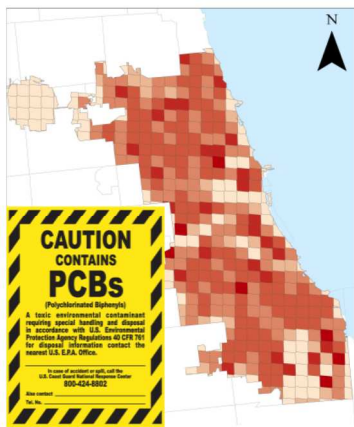

ABSTRACT.

Urban areas are important regional sources of airborne polychlorinated biphenyls (PCBs) and population-scale airborne exposure, yet a comprehensive bottom-up source inventory of PCB emissions has never been quantified at urban scales in the United States. Here we report a

comprehensive parcel level inventory of PCB stocks and emissions for Chicago, Illinois, developed with a transferable method from publicly available data. Chicago's legacy stocks hold 276 ± 147 tonnes Σ PCBs, with 0.2 tonnes added annually. Transformers and building sealants represent the largest legacy categories at 250 and 20 tonnes, respectively. From these stocks, annual emissions rates of 203 kg for Σ PCBs and 3 kg for PCB 11 explain observed concentrations in Chicago air. Sewage sludge drying contributes 25% to emissions, soils 31%, and transformers 21%. Known contaminated sites account for <1% of stocks and 17% of emissions to air. Paint is responsible for 0.00001% of stocks but up to 7% of Σ PCBs emissions. Stocks and emissions are highly concentrated and not correlated with population density or demographics at the neighborhood scale. Results suggest that strategies to further reduce exposure and ecosystem deposition must focus on the largest emissions sources rather than the most contaminated sites or the largest closed source legacy stocks.

INTRODUCTION.

Polychlorinated biphenyls (PCBs) are a class of compounds that were widely used in a variety of industrial and manufacturing applications between 1929 and 1979. The Aroclor mixtures produced by Monsanto comprised the largest share of total PCB production and were common additives in dielectric fluids in electrical transformers and capacitors. Other formulations were also used as components of caulk and joint sealers, electrical wiring coatings, carbonless copy paper, and adhesives.^{1, 2} PCBs are classified as persistent environmental pollutants because of their resistance to chemical, thermal, and biological degradation coupled with their potential human health effects. They were initially banned because of their carcinogenicity; more recent studies have found that PCBs may also pose a threat to human neurological and endocrine systems.^{3, 4 5-7}

Airborne PCBs pose a hazard to ecosystems and humans. Although PCBs have not been intentionally produced in the US since the late 1970s, they continue to be detected in ambient air samples throughout the world. In 2000, deposition of airborne PCBs was identified as the largest categorical source to Lake Michigan.⁸ PCBs are a primary cause for fish consumption advisories in the Great Lakes, fish consumption is an important dietary source of PCBs for some Great Lakes sub-populations, and recent studies have shown that inhalation of airborne PCBs is an important exposure route for children and adults.⁹⁻¹²

Pollutant source inventories are useful for quantifying emissions and exposure at local to regional scales. Source-resolving, spatially specific emission inventories are developed using a “bottom-up” approach that combines estimates of chemical production, use, and disposal with emission factors for each compound and activity.^{13, 14} For criteria air pollutants, these source-centric inventories serve as the basis for atmospheric chemical transport modeling applications in air quality forecasting and regulatory decision support.^{15, 16} Developing and applying similar inventories for PCBs and other semi-volatile organic pollutants (SVOCs) has been limited due to uncertain and limited stock and emissions activity data, sparse concentration and emissions factors, and limited requirements for the use of atmospheric modeling in regulatory activities.

Studies to date have attempted to quantify urban PCB sources and emissions rates, primarily through “top-down” inversion of atmospheric concentration measurements, which estimate totals of stocks and emissions at urban scales but cannot resolve the contributions from each individual local source. Inventories for Zurich, Switzerland were developed using field measurements¹⁷ and subsequently augmented with a multicompartment box model,^{18, 19} estimating urban emissions totals for 46 and 6 PCB congeners, respectively. A study in the New York City metropolitan area identified a local point source through observations and dispersion modeling, and extrapolated

the source strength to estimate total urban emissions.²⁰ A series of studies in Toronto, Canada have developed bottom-up inventories for PCBs in electrical equipment and building sealants, and employed spatially specific top-down emissions estimates to simulate PCB chemical transport in multicompartment models and contextualize the potential effectiveness of Canada's implementation of the Stockholm Convention for equipment that contains PCBs.²¹⁻²⁴ The Toronto inventory found that closed sources of PCBs accounted for 97% of stocks, and that emissions accounted for 0.01–0.30% of stocks, explaining observed stabilization of atmospheric PCB concentrations.

The goal of this study is to compile a comprehensive urban inventory of PCB stocks and atmospheric emissions for Chicago, Illinois. Meat packing plants, steel and iron mills, oil refineries, chemical plants, and other industries dominated the local economy in the 20th century and left a legacy of pollution, including PCBs. Like many American cities, Chicago experienced a significant building boom during the 1950s-1970s, when PCBs were commonly used in building construction and infrastructure expansion. This history, along with the city's size, has resulted in a multitude of potential source sectors. Additionally, many reports document elevated concentrations of airborne PCBs in Chicago.²⁵⁻²⁹ Chicago waterways are also contaminated with PCBs.^{30,31} Atmospheric PCBs in Chicago air are known to originate from multiple sources, some of which are not declining, suggesting that both fresh emissions and legacy sources contribute to observed concentrations.³²

We developed estimates for both legacy PCB stocks contained in building sealants, known transformers, and soils, as well as variable emissions sources such as wastewater treatment plant sludge drying facilities, architectural paint, and landfills by synthesizing information from current scientific literature and publicly available databases. Developing estimates for both

stocks and emissions supports an integrated approach to developing exposure assessments and policy recommendations based not only on the estimated size of each category of stock, but also its availability for atmospheric release. Building a complete, easily replicable, spatially specific, bottom-up inventory of PCB stocks from publicly available data sources is an important first step in identifying key sources of emissions and exposures to inform scientific and regulatory efforts nationally, and throughout the world.

By quantifying source stock profiles with all 209 PCB congeners, defined by number of chlorine atoms and their functional positions, this method supports assessment of the contribution of non-Aroclor PCB sources to total emissions and concentrations. It has been shown that 3,3'-dichlorobiphenyl (PCB 11) is the 5th most prevalent congener in Chicago air throughout the city.²⁸ PCB 11, along with more than 50 other congeners, has been identified as an inadvertent and largely unregulated by-product of diarylide, azo, and phthalocyanine pigment production.^{28, 33, 34} These pigments are used in architectural paint as well as a wide range of consumer products such as newspapers and magazines, food packaging, and plastic bags. Although knowledge of the inadvertent production of PCBs during pigment production has been available to policymakers since at least the 1970s,³⁵ production of certain materials with PCB concentrations of up to 50 ppm produced in controlled manufacturing processes and as unintentional contaminants is exempt from the Toxic Substances Control Act (TSCA) as negligible contributors to PCB stocks and flows. This argument, however, fails to consider the fact that, while small in volume and concentration, PCBs in such applications are readily available for volatilization to the atmosphere, and also enter into the waste stream where they can contaminate recycled materials. Citywide release of PCB 11 results in an average atmospheric concentration of 24 pg m⁻³, although the magnitude of city-wide emissions has not yet been quantified.²⁸

EXPERIMENTAL/MATERIALS & METHODS

The mass of pure PCBs, their spatial distribution, and annual emissions estimates were calculated for both legacy stocks and flows from annually variable emissions sources. We included every source sector where the prevalence of materials with known PCB concentrations could be estimated from parcel-scale spatial surrogates from publicly available data.

Estimating Urban PCB Stocks

For each source sector, we estimated stocks by combining a publicly available spatial surrogate, which approximates the spatial distribution of where emissions activities take place or source materials are stored, with a reported source-specific PCB mass concentration or emissions factor. For stocks with source materials where congener-specific PCB concentration estimates were unavailable, they were calculated from the profiles of Aroclor mixtures used in those applications, using reported fractional contributions of each PCB congener to the Aroclor mixtures.³⁶ Data for each source sector are summarized in Table 1. Unless otherwise noted, the City of Chicago 2010 Land Use Survey³⁷ served as the primary source for all spatial surrogates. This dataset contains parcel area; building footprint, age, and number of stories; and zoning information for each individual parcel. Chicago's parcels, or individual taxable plots of land, range in area from <0.1 hectare for residential plots to 10+ km² for large public parks. Thus, this inventory resolves stocks and emissions activities at the highest spatial resolution currently possible. Here, we aggregate parcel level results to a 1.33 x 1.33 km² Lambert Conformal Conic grid to identify variability at the neighborhood/census tract scale that an urban chemical transport modeling system would resolve. All GIS processing was conducted using ArcGIS 10.1. For each

stock category, we estimated net uncertainty ranges by propagating known sources of variability in PCB concentrations and activity estimates.

Legacy Stocks

We define legacy stocks as sources generated during the initial period of PCB production that have not yet been eliminated.. This category includes polysulfide sealants in buildings constructed between 1940 and 1979, transformers documented in the National Transformer Registry, soils, and known contaminated sites including the Chicago Confined Disposal Facility and the Chicago Sanitary and Ship Canal.

Sealants

Building sealants are an important PCB reservoir in Chicago. During their period of production, PCBs were added to caulks and joint sealants as a plasticizing agent that also improved product durability.¹ In buildings constructed or renovated before 1977, such products were used to seal joints between masonry units and around windows. Previous studies have reported total PCB concentrations up to 33,000 ppm in caulking/gasket materials, foamboard insulation, and HVAC system parts.³⁸ We calculated the volume of all Chicago buildings constructed between 1940 and 1979 from building footprint and height data. Employing the methodology, conversion factors, and average PCB concentrations established by Diamond et al. (2010)²¹ and Robson et al. (2010)²⁴, we combined building volume, average mass of sealants per unit volume (55 g m^{-3}), and average sealant PCB concentration (0.00463 g/g). Without local information on the prevalence of PCB in building sealants, we applied an identical estimate that 14% of buildings constructed from 1940-1979 contained PCB sealants. We propagated uncertainties using the

range of PCB concentrations reported by Robson et al. Building sealants used during the target time period were primarily formulated using Aroclor 1254.³

Transformers

Insulating fluids used in electrical transformers and capacitors represented 75% of total PCB sales in the United States.¹ However, only 5-10% of all the transformers manufactured during the era of PCB production actually contained PCBs due to the availability of less expensive alternatives.¹ By mass, the majority of PCBs in these applications were used in transformer askarel, with a single transformer containing 200 – 2,000 kg of insulating fluid.¹ Data on known transformers stored in the Chicago area came from the 2011 National Transformer Registry, which documents 177 registered transformers in the area.³⁹ In addition to transformers listed on the voluntary national registry, Hsu et al. (2003) documented a large transformer storage yard located at the intersection of First Ave and the Eisenhower Expressway, and estimated that the 10 acre lot could potentially contain up to 500 PCB-containing transformers.²⁹ The mass of PCBs contained in stored electrical transformers was calculated using methods previously applied to Toronto.²¹ Mass was estimated for registry entries with incomplete data, as well transformers located at the unregistered storage yard noted by Hsu et al., by determining average transformer weight based on complete registry entries listing the number and weight of transformers stored in the Chicago area. We applied prior estimates that insulating fluids accounted for approximately 30% of a transformer's total mass and contained 60% PCB composition (80% maximum, 40% minimum)²¹. Erickson & Kaley (2010) catalogued the use of Aroclors 1242, 1016, 1254, and 1260 in the dielectric fluid of transformers and capacitors.¹ Leakage rates of 0.06% year⁻¹, based on studies from the 1990s,⁴⁰ were bounded by an order of

magnitude to reflect uncertainty in contemporary leakage under unknown storage and use conditions.

Soils

Soil may be one of the largest global PCB repositories, potentially containing 21,000 tonnes of PCBs worldwide due to deposition from manufacturing, leaching from building materials or landfills, and the application of wastewater treatment plant biosolids.⁴¹ We estimated the volume of soil in contact with the atmosphere by synthesizing zoning classification information from the 2014 City of Chicago Zoning and Land Use Ordinance with estimates of the fraction of pervious surface associated with urban land uses, assuming a soil:air exchange depth of 0.12 m.^{22, 42, 43} The concentration range for PCBs in urban soils (3 - 220 ng/g dry weight) was estimated from 15 cities globally (averaging 50 ng/g), and the range of total PCB mass estimated using the average bulk density of urban soils.^{42, 44} We estimated 50% (10% - 100%) of all pervious surfaces as urban soils to account for variability in exchange depth, density, and estimates of pervious surface fraction for each urban land use type. We did not account for the potential impact of vegetation on emissions rates from soils.

Contaminated Sites

Two contaminated sites in Chicago are known to contain sediments with high PCB concentrations. The Chicago Sanitary & Ship Canal (CSSC) opened in 1900 to carry shipping traffic and reduce the amount of pollution flowing into the Lake Michigan drinking water supply via the Chicago River. Medium and heavy industrial firms were primary users of the canal during Chicago's "Golden Age" of industrial development (1895-1920), when "many business owners...perceived the canal as an 'open sewer'".⁴⁵ The CSSC extends 53.1 km from Chicago to

Lockport, IL, and receives discharge from the Stickney and Lemont Water Reclamation Plants (WRPs).⁴⁶⁻⁴⁸ CSSC sediment volume was calculated from the average width of the canal (62 m) and an estimated sediment depth of approximately 0.1 m. Speciated PCBs concentrations in CSSC sediment were taken from a 2006 sediment quality study by the Metropolitan Water Reclamation District of Greater Chicago (MWRDGC), and we assumed no reduction in sediment PCB concentration from 2006 to 2011. Sample concentrations for Aroclors 1016, 1248, 1254, and 1260 mapped to a profile of 209 congeners measured in the Indiana Harbor and Ship Canal (IHSC).^{31, 49} Given the similarity in historical and contemporary land use (steel manufacturing, petroleum refineries, heavy industry) and Aroclor applications, the PCB congener profile of CSSC sediment appears similar to that of the IHSC in nearby East Chicago, Indiana, with both dominated by Aroclor 1248.

The Chicago Area Confined Disposal Facility (CDF) is an Army Corps of Engineers facility constructed in 1984 south of Calumet Harbor to store contaminated sediment dredged from the Calumet River and the Chicago River/Harbor.^{50, 51} The mass of pure PCBs contained in the CDF was calculated from the CDF's estimated soil volume, soil density, and the average PCB concentration of contaminated sediments (0.0025 mg/g), and emissions estimated from exposed surface area.²⁹ We applied the IHSC congener profile to the CDF sediment, including the presence of Aroclors 1248, 1254, and 1260. In the absence of congener-specific sample analyses, we estimated profiles from these sources only for Aroclors, and excluded any potential presence of non-Aroclor PCBs.

Variable inputs to PCB stocks and emissions

PCB use, processing, recycling, and new production within the urban system result in both material flows and emissions into the atmosphere. The inflows of PCBs into urban stocks and the emissions the air from these non-legacy sources fluctuate from year to year. Sources in this category include sewage sludge drying beds at municipal wastewater treatment plants, landfills, and architectural paint.

Sludge drying

Sewage sludge drying beds at municipal wastewater treatment plants are a documented source of PCBs.^{29, 52, 53} The MWRDGC is served by seven WRPs. Sewage sludge collected during the water treatment process is dried and, depending on quality, used as fill in recreation areas, final landfill cover, and other landscaping projects as part of the district’s biosolids program.⁵⁴ Biosolids are also applied to farmland in a semi-dried state or simply disposed of in municipal landfills. The mass of PCBs in sludge generated annually at MWRDGC facilities was calculated from the mass of biosolids produced district wide (170,462 tonnes) and the average concentration of \sum PCBs in municipal sewage sludge (1.0 mg/kg dry weight).^{11, 32} Three of MWRDGC’s biosolids-producing wastewater treatment facilities were included in our estimate due to their proximity to the City of Chicago, including the Stickney WRP, the district’s largest sludge producer, located along the Chicago Sanitary and Ship Canal at the western boundary of the city. The Calumet (southeast) and Terrence J. O’Brien (northeast) WRPs were also included. We assume that biosolids produced at Chicago’s WRPs exhibit a congener profile similar to the human PCB body burden and the wastewater profile.^{55, 56} We allocated stocks and emisisions to the three WRPs by the reported areas of their sludge drying beds.

Landfills

Without local source data, the total stock of PCBs in Chicago landfills is unknown. However, the emissions to air from PCBs in landfills can be estimated. Municipal landfill gas contains PCB concentrations of up to 400 ng m^{-3} ⁵⁷ and a Chicago landfill was found to emit $239 \text{ } \mu\text{g s}^{-1}$ ²⁹, and possibly higher for facilities that accept hazardous materials. PCBs were used in a multitude of landfilled products, including carbonless copy paper, small capacitors in consumer electronics and appliances, and construction and demolition materials.^{1, 58} While unquantified at local scales, these stocks of legacy PCBs from demolished buildings and electrical equipment were typically disposed of in local landfills rather than incinerated or treated as specialized hazardous waste. Landfills also contain PCBs from products currently in production, such as leftover architectural paint, pigment-containing packaging and print materials, and biosolids as both waste and fill material.^{31, 34, 41} Lacking data on landfill materials, volumes, dates, and PCB concentrations, we did not develop an estimate for the mass of PCBs contained in Chicago landfills. Three landfills have been constructed within Chicago city limits since 1967: CID RDF #3 (closed 2009), Harbor View Landfill (closed 1998), and River Bend Prairie Landfill (the single active landfill in Cook County). The congener profile of a landfill reflects the profiles of its composite materials. Murphy et al. (1985) noted the presence of PCB-containing carbonless copy paper and capacitors from consumer white goods in older landfills; these items are known to contain Aroclor 1242 and Aroclors 1242, 1016, and 1254, respectively.

Paints & Pigments

Architectural paint has been identified as a source of airborne PCB congeners unrelated to historical use of Aroclors. These congeners are present in paint due to inadvertent production during the manufacture of pigments. The US EPA documented the presence of PCBs in dried paint at concentrations ranging from $<1 \text{ ppm}$ to $97,000 \text{ ppm}$ (0.001 to 97 ng/g)⁵⁹; Hu &

Hornbuckle (2009) detected PCB concentrations in commercial paint pigments ranging from 2 to 200 ng/g fresh weight.³³ Pigments used in paint, packing materials, and other consumer products are currently the only known sources of PCB 11.

We estimated the stock of pure PCBs from in-use architectural paint, and used annual volume of paints sold by Chicago retailers to estimate the inflow of new paint added annually. The spatial distribution and total stock of in-use architectural paint was approximated using building interior wall area as a spatial surrogate, estimated from building footprint and number of stories. To estimate the volume of paint sold in the Chicago area each year we began with national paint/architectural coating sales.⁶⁰ Using Chicago-specific data on sales and production values from the 2007 Economic Census, we estimated the volume of paint sold and produced locally each year, and further refined this estimate to reflect the estimated market share of PCB-containing organic pigments (30%).^{61, 62} We then estimated the mass of pure PCBs added to Chicago buildings via annual retail sales and annual production from sales and production volumes, paint density, and the average congener-specific PCB concentration of whole paint. The Chicago area's 20+ paint manufacturing operations may also be a potential point source of PCB emissions, but stack emissions rates due to production have yet to be quantified. There are over 50 PCB congeners in commercial paint pigments and the specific congeners present varies among pigment types and manufacturers.³³ We applied an average profile for \sum PCBs based on sales volume and color for paints with PCB-containing dyes, highlighting results for PCB 11, the most commonly detected non-Aroclor congener. We assumed all paint emitted indoors makes it way to outdoor air without loss.

The Human Reservoir

Human body burdens provide a natural for contextualizing the magnitude of PCB sources in the urban environment, and may represent a primary source of PCBs to municipal wastewater. We estimated PCBs in Chicago residents and direct emissions from respiration using ACC-HUMAN, assuming steady state body burdens and configuring ACC-HUMAN with observed Chicago air and water concentrations and U.S. dietary PCB consumption.^{63, 64}

Emissions Modeling

We calculated annual emissions rates from the mass of pure PCBs for each source sector on the 1.33 km grid. We estimated annual emissions rates by integrating hourly congener-specific fugacity-based gas phase mass transfer, following the steady-state approach of Diamond (2001) for soil:air, water:air, and film:air exchange.^{21, 65} ^{21, 23} Mass transfer coefficients were calculated from hourly quality-controlled observations of temperature, pressure, and wind speed at Chicago O'Hare Airport from the NOAA Quality Controlled Local Climatological Data. As water temperature monitoring in the CSSC began in 2015, CSSC water temperature was estimated from U.S. Geological Survey 2013-2014 hourly observations of the Des Plaines River at Channahon, Illinois, the nearest available site, and the river to which the CSSC drains.⁶⁶ We propagated through all emissions rates the 7% uncertainty attributed the use of the single O'Hare observational site to represent variability in urban meteorology across Chicago on the 1.33 km grid.⁶⁷

RESULTS AND DISCUSSION

Chicago PCB stock inventory

The total mass of Σ PCBs stored in legacy stocks (sealants, transformers, soils, the CDF, and the CSSC) is approximately 276 (121 - 414) tonnes. Transformers and sealants represent the largest

stocks, and contain 250 and 20 tonnes of Σ PCBs, respectively. Areas with a greater number of buildings constructed between 1940 and 1979 are expected to contain larger amounts of PCBs associated with building sealants. These include residential districts along the north and southwest edges of the city, which expanded rapidly after World War II, as well as the dense landscape of skyscrapers downtown. Other “hotspots” align with the locations of large transformers and transformer storage facilities, as in southeast Chicago, a historically industrial area that now houses a cluster of transformer warehouses.⁶⁸ Variable inflows (paint and WRP sludge drying beds) make only a small annual contribution relative to the total stock, adding an estimated 0.2 tonnes each year, with paint adding only 0.00001% to the existing stock each year.

Chicago Emissions Rates & Atmospheric Concentrations

We estimate annual PCB emissions from all quantified sources as 203 (94-736) kg year⁻¹ (Table 2). Approximately 70% of this total is attributable to volatilization from legacy sources, while the remaining 30% is released from variable sources. Municipal sludge drying beds represent roughly 25% of total annual emissions, a significant portion considering their small contribution to total stocks. Similarly, although paint increases Chicago’s total PCB stock by only 0.00001% each year, it accounts for 1.7% (0.2% - 6%) of total annual Σ PCB emissions and all primary PCB11 emissions accounted for in this inventory. Depending on soil concentrations and transformer leakage rates, we also expect 30% of total annual emissions to come from soil, and an additional 22% from transformers. The body burdens of Chicago residents total to 58 kg, and account for flows of 18 kg/year to wastewater, with the remaining PCBs in biosolids due to industrial sources and suburban populations served by the MWRDGC.

The spatial distribution of annual emissions (Figure 2a) mirrors that of total PCB stocks (Figure 1b), with hotspots near known transformer storage locations (Figure 1a). Emissions from soils are concentrated in single-family residential districts and other areas with higher proportions of pervious surface cover (Figure 2a). The majority of biosolids production in the Chicago area takes place at the Stickney Water Treatment Plant in Cicero, just west of the Chicago city limits. Emissions are highly concentrated, as shown in maps of \sum PCB and PCB 11 emissions on semi-log scales in Figure 2. The 98th percentile (top 10) and 88th percentile (top 50) of gridcells with the highest PCB levels are responsible for the majority of the city's \sum PCB stocks (64%, 81%) and emissions (52%, 75%). These concentrated locations are often the same for legacy and non-Aroclor emissions: the top 10 grid cells for PCB11 emissions contain 5 times more \sum PCBs and almost 7 times more \sum PCB emissions than the average populated grid cell. We estimated atmospheric concentrations using an inert tracer box model over the city (588 km², 450 m mixed layer, Chicago O'Hare airport observed average wind speed of 4.2 m s⁻¹). Average concentrations due to this inventory would be 1.26 ng m⁻³ for \sum PCBs and 19.03 pg m⁻³ for PCB 11, roughly matching observed ambient concentrations in the city of 1.13 ng m⁻³ and 24 pg m⁻³, respectively.^{25, 27, 69}

Comparison to other stock and emissions inventories

We compare results to prior inventories, urban source identification efforts, and emissions estimates in order to contextualize results from this study, confirm findings from prior studies, and improve understanding of urban PCBs.

One key question about PCBs from the urban environment is the degree to which population-based estimates, developed for use in global chemical transport studies, can predict the

magnitudes and distributions of PCB sources and emissions at the spatial scales needed for urban and regional policy assessment. To produce a population-based estimate at the local scale following the methods of Breivik et al. (2001), we allocated their estimate of total historic PCB consumption to the 2010 US population, yielding a national estimate of \sum PCB mass per capita.⁷⁰ This value was then applied to the city of Chicago, resulting in a citywide top-down \sum PCB stock estimate of 2200 tonnes (Table 3), an order of magnitude greater than this study's bottom-up estimate. A national, production-based approach represents a maximum estimate for all PCBs since their initial introduction to the market, while our estimate represents the current stock that can be accounted for from known sources. However, even an inventory based on all-time integrated use and disposal may be biased low due to the extensive use of PCBs in manufacturing in Chicago and PCB transport through the city by rail, which could lead to stocks far exceeding the expected local footprint.

Our inventory for Chicago is consistent with estimates of stocks and emissions for Toronto (Table 3), a city of similar age, geographic area, total population, and population density. Toronto's known transformer stock inventory is higher, with overlapping uncertainties. As a fraction of total stocks, the resultant net emission rate estimate of 0.1% (0.07% - 0.18%) is consistent with prior urban modeling for PCBs (0.01%-0.3%) and \sum PBDEs (0.01%) in Toronto.^{21, 23, 71} Our inventory is roughly 14 times greater than the emissions estimate for Zurich, Switzerland, based on inversion of PCB concentrations in air.^{17, 18} While Zurich and Chicago have similar population densities, Zurich has roughly 15% of Chicago's population and land area, and its less extensive industrial history likely explains why it has only half the \sum PCB emissions on a per-capita basis.

Results for Chicago corroborate that transformers and building sealants are the most important urban stocks, but that an inventory based exclusively on mass excludes the majority of key contributors to urban emissions. Instead, the Chicago inventory underscores the realization that urban PCB concentrations arise due to multiple distinct point and area source sectors requiring different remediation strategies.⁷² An independent source apportionment study of observed concentration profiles in Chicago suggested 17-20% of Σ PCBs are due to leaks from closed sources, 17-20% from dispersed Aroclors, and 21-22% from secondary sources—contributions that align closely with this study's central estimates of transformers (21%) as closed sources, dispersed Aroclors from sealants and contaminated sites (18%), and soils (34%) as a dominant secondary source.

Emissions estimates are contextualized by an inventory of reported emissions for the Great Lakes region, which found volatilization from the lakes to air of 29 tonnes from 1992-2000.⁴⁰ While the reported values likely underestimate total releases, they highlight the importance of emissions from Chicago to the regional budget: quantified annual emissions from Chicago correspond to 6.2% (2.8% - 20.8%) of the reported decadal release of PCBs to air across the 244,000 km² surface area of the lakes, and represent observed enhancement of PCB 11 in samples throughout the lower Great Lakes.⁷³ Emissions rates are also consistent with prior studies, considering population and economic and land use histories, with prior estimates for Milwaukee (120 kg year⁻¹) and New York City (300 kg year⁻¹).^{20, 74} Overall, considering annual deposition of 1500 kg year⁻¹ to Lake Michigan⁷⁵ and observed atmospheric concentrations in the city, this inventory likely resolves most emissions from the City of Chicago, especially if its suburbs and the lake's industrialized southern shore are each responsible for similar quantities.

Exposure demographics

398 We compared PCB stocks and emissions to U.S. Census 2010 tract-level demographics on the
399 1.33 km modeling grid to determine whether any groups face an inordinately high exposure risk
400 from living in close proximity to PCBs. Demographic characteristics included race, median
401 household income, disability status, as well as populations under 18 or over 65 years of age.
402 Total population density was correlated with PCB 11 emissions ($r^2 = 0.55$) but not with \sum PCB
403 stocks ($r^2 = 0.003$) or emissions ($r^2 = 0.004$). Density is strongly correlated at this spatial scale
404 with poverty ($r^2=0.994$), children, and the disabled. No statistically significant correlations were
405 found with any demographic group's population or local prevalence after accounting for
406 population density. Thus, on a city-wide basis, all demographic groups have a similar risk of
407 exposure to stocks and emissions from this inventory. However, city level comparisons have
408 limited applicability to PCBs, as stocks and emissions are concentrated in industrial districts with
409 low populations. We therefore assessed the populations living near the top 10 and top 50
410 gridcells with the highest PCB levels, as compared to the citywide average, and applied a similar
411 analysis to the 98th and 88th percentiles for each demographic variable (SI). We found few
412 environmental justice issues related to local PCB sources at the 1.33 km scale. Areas with the
413 highest \sum PCBs (both emissions and stocks) and PCB11 emissions were generally more dense
414 than the average gridcell, with fewer children, senior citizens, and disabled persons than average.
415 PCB11 emissions hotspots are associated with both diverse and segregated residential areas:
416 with both higher household incomes and more people in poverty, and higher proportions of
417 white, Latino, and Asian-American residents. Neighborhoods with the highest concentrations of
418 senior citizens and Caucasians contained nearly twice as many PCB stocks and emissions than
419 average.

420 **Uncertainty in Stock and Emissions Estimates**

These estimates are subject to large uncertainties in the source sectors included, the representativeness and accuracy of PCB concentrations in each material, the completeness of the spatial surrogates in representing the current presence and emissions of PCBs, and the emissions modeling. Among nine source categories, building sealant and soil concentrations are the only parameters for which global observations support the estimation of a probability distribution, and may not be representative for Chicago.

We identify transformers quantities, PCB concentrations, and leakage rates as the most important net uncertainties in the inventory, followed by soil concentrations and their correlations with urban land use classifications. Transformer leakage rates have not been re-examined since the 1990s, and likely represent the greatest quantifiable source of parametric uncertainty, with our order of magnitude bounding of leakage rates responsible for up to 90% of uncertainty in the stock inventory and 71% of emissions. The representativeness of PCB concentrations and their congener profiles for urban soils are the only other major source of parametric uncertainty (26%) in the emissions inventory, and currently omit the much higher concentrations possible at former industrial sites, along railroads, and in residential areas that were once downwind of large point sources. Other sources omitted from this inventory are likely a far greater source of uncertainty. The voluntary nature of the National Transformer Registry and documented presence of unregistered transformers in storage in Chicago suggests a potentially higher contribution from this large sector. Manufacturing and industrial processes known to inadvertently emit PCBs are associated with cement kilns, titanium processing, and steel mills, and are likely the largest unresolved contributor to emissions.⁷⁶

Unresolved contributions from other closed sources (e.g. light ballasts) are likely of the same magnitude as sealants, and feature the same poorly quantified leakage rates as transformers, but

are even more difficult to enumerate. Given their potential importance as sources to indoor concentrations and exposures and the relatively low cost of removal and replacement, policies to control light ballasts and other in-use closed sources may represent a tractable incremental step for reducing indoor exposures, independent of their unquantified contributions to PCB stocks, emissions, and outdoor concentrations. Despite the potential for widespread and diffuse use and distribution of PCB 11 sources, we focused solely on architectural paint to approximate the size of potential PCB 11 sources in Chicago. We expect pigments in paper, receipts, clothing, furniture, building materials, and other consumer products to make negligible contributions to total stocks, and small but important sources to outdoor and indoor air.

Policy implications

Results from this study have large policy implications in refocusing efforts to reduce urban PCB concentrations and population exposures in the U.S. and in urban areas globally. To date, U.S. efforts to reduce PCBs in humans and the environment (e.g. the Toxic Substances Control Act and the Comprehensive Environmental Response, Compensation, and Liability Act) have focused on eliminating new sources of PCBs and remediating major Aroclor sources such as electrical equipment and highly contaminated sites. However, we find that secondary sources are responsible for more than 67% of emissions. Though open applications of PCBs were officially banned in 1973, diffuse and/or inadvertent sources are not regulated as long as they comply with monitoring/reporting requirements.³⁴ Emissions from open, easily volatilized secondary sources contribute significantly to observed ambient PCB concentrations in urban air; the fact that there are no reporting PCB emitters in Chicago in the most recent (2013) Toxic Release Inventory suggests that such sources may indeed warrant renewed regulatory interest.

Current policies such as CERCLA (1980), the Great Lakes Binational Toxics Strategy (1997) EPA's Region 5 Polychlorinated Biphenyl Phasedown Program (1999), and the Great Lakes Restoration Initiative (2011) have emphasized reducing the largest stocks and most contaminated sites, with the assumption that these most concentrated stocks are the a greatest threat, rather than specifically quantifying and systematically reducing total human or ecosystem exposure or harm. As a result, limited reductions in ambient concentrations and urban, regional, and global atmospheric transport and deposition have remained mostly unquantified externalities. The first generations of toxic substances policies have proven to be a good starting point by eliminating many of the largest highly concentrated PCB stocks and uses of legacy Aroclors, such that contaminated sites represent a small fraction (17%) of the emissions inventory for a large post-industrial urban area, and there are no regulated uses or emissions of Aroclors in the city. However, such incremental policies do not provide a comprehensive, rational planning framework for managing all PCB emissions from dispersed sources. Our findings suggest that alternative courses of action that take into account source availability as well as size may be necessary to achieve additional reductions in atmospheric PCB concentrations. This marks the beginning of a new phase in a natural progression: the success of policies like CERCLA and TSCA in halting the production of highly concentrated PCB materials and remediating contaminated sites means that the most important sources of PCBs to the environment are now smaller, more widely dispersed, and due more to inadvertent manufacturing byproducts, building materials, contaminated soils and sediments, and biota than to legacy supplies in closed sources. Even in this context, the largest PCB reservoirs are not necessarily the largest contributors to air concentrations or exposures. This work emphasizes the importance of distinguishing between the mass of PCBs contained in a source and the stock's availability for volatilization. When deciding

on a course of action, efforts to reduce airborne PCBs and PCB deposition to ecosystems should take emissions potential into consideration, rather than mass alone. This is especially true for variable sources, which can play a significant role in contemporary urban PCB emissions despite their small contributions to the total stock. While such sources have not typically been included in urban source inventories, we find that they make significant contributions to atmospheric PCB concentrations, greater than the average estimate for annual emissions from transformers. PCB 11 is one of the most volatile PCBs and may be emitted to air within hours to days of paint application. This congener has been consistently detected in ambient air samples, and there are no known sources other than paints and pigments. The preliminary results of this study suggest that despite paint's relatively small contribution to the total stock, emissions rates are consistent with observed atmospheric concentrations of PCB 11.²⁸ The contribution of paint should therefore be further investigated to assess the potential need for regulatory action. This includes in-use architectural paint, which could present significant indoor exposure risks, as well as emissions from paint and pigment manufacturing facilities, which may be potentially significant PCB point sources.

Initiatives to reduce PCB emissions associated with WRP sewage sludge drying facilities would address a major source of PCBs to the air while providing additional benefits. Fly ash has been shown to effectively and inexpensively remove PCBs and other organic compounds from wastewater and biosolids.⁷⁷ Affordable PCB-eliminating phytoremediation using poplars⁷⁸, grasses⁷⁹, and wetlands plants⁸⁰ or bioremediation using transgenic bacteria may also reduce the levels of other potentially harmful compounds that have been detected in municipal wastewater and biosolids and in Lake Michigan, including persistent organic pollutants, medications, hormones, and personal care products.⁸¹⁻⁸⁴ Such improvements in the wastewater treatment

process may also preclude regulatory action under the Federal Clean Water Act, which regulates PCB levels in waterways where a Total Maximum Daily Load (TMDL) for PCBs has been established.

Financial incentives for program compliance have not significantly decreased PCB stocks in the U.S. or Europe. In the U.S., states and tribes are eligible to receive funding to support compliance through TSCA's Compliance Monitoring Cooperative Agreements. However, out of 77 total grants in FY2013, only 7 went to PCB projects, and even those were for tasks such as conducting inspections rather than actually removing or destroying PCBs.⁸⁵ Despite employing a different approach, Belgium and the Netherlands both experienced only minimal success via programs to provide subsidies for private companies to upgrade equipment containing PCBs.⁸⁶ These examples suggest that financial incentives may not be effective in making significant reductions in legacy stocks.

The US and other industrialized nations have experienced similar challenges in reducing ambient PCB concentrations. Building and maintaining complete and accurate inventories has been a major difficulty globally, as have data gaps created by the absence of comprehensive data on environmental PCB concentrations and the challenges of comprehensively quantifying sources.⁸⁶ This study highlights the potential global benefit from looking beyond large, traditional sources in identifying and reducing the inadvertent production and emission of PCBs. The 50 ppm internationally accepted benchmark concentration may have been beneficial in the initial regulation of large stocks, but this target now stands to be broadened to include more volatile large volume emissions sources.

AUTHOR INFORMATION

534 Corresponding Author

535 *Phone: [319] 335-9993; fax: [319] 335-6801, e-mail: scott-spak@uiowa.edu

536 ACKNOWLEDGMENTS.

537 This study is supported by the National Institute for Environmental Health Science
538 (NIEHS/NIH) through the Iowa Superfund Research Program (NIH P4 2ES01366), and by the
539 Great Lakes Program Office of the U.S. Environmental Protection Agency (GL-00E00515). We
540 thank Mitchell Erickson for guidance on PCB prevalence in manufactured products, Mark
541 Pooley for assistance with spatial analysis techniques, Colin O'Sullivan for information on the
542 Chicago Sanitary & Ship Canal, and members of the Hornbuckle Research Group for valuable
543 feedback during the research process. The content is solely the responsibility of the authors and
544 does not necessarily represent the official views of the NIEHS, NIH or US EPA.

FIGURES & TABLES.

Table 1. Source sector stock and emissions parameters. spatial surrogate totals, and associated data sources.

| Source Sector | Spatial Surrogate | Surrogate Total | Central Σ PCB Concentration or Emission Factor | Aroclor Profile |
|-------------------------------|---|-------------------------------|---|----------------------------------|
| Sealants | Building volume | 156 m ³ | 599.30 g m ⁻³ | 1254 |
| Transformers | National Transformer Registry locations | transformers | 358,000 g m ⁻³ | 1242, 1016, 1254, 1260 |
| Soils | Pervious surface area | 357 km ² | 0.10 g m ⁻³ | Non-Aroclor |
| Chicago CDF | Surface area | 0.17 km ² | 9.00 g m ⁻³ | 1248, 1254, 1260 |
| Chicago Sanitary & Ship Canal | Canal volume, sediment depth | 3 km ² | Sediment: 8.3 g m ⁻³ Water: 33 ng m ⁻³ | 1248, 1254, 1260 |
| Paint: in use | Building wall area | 79 km ² | 0.0134 g m ⁻³ | Non-Aroclor |
| Municipal landfills | Landfill area | 12 km ² | 0.045 $\mu\text{g s}^{-1} \text{m}^{-2}$ | 1242, 1016, 1254; Non-Aroclor |
| Sludge drying beds | Biosolids production | 4 km ² | 0.72 g m ⁻³ | Non-Aroclor |
| Human population | Population density | 4,450 persons/km ² | 0.01 g/person | Non-Aroclor |

Table 2. City of Chicago Σ PCB mass and annual emissions estimates by source sector.

| Source Sector | | |
|---------------------------------|---|--|
| Legacy stocks | Stock of pure PCB (tonnes) | Σ PCB emissions (kg year ⁻¹) |
| Sealants | 20 | 2 (2-3) |
| Transformers | 250 (120-390) | 42 (4-452) |
| Soils (background) | 2.2 (0.02-22) | 64 (6-172) |
| Chicago CDF | 1.3 | 26 (24 -28) |
| Chicago Sanitary & Ship Canal | 1.2 (0.6-1.8) | 8 (4-13) |
| <i>Subtotal: Legacy stocks</i> | <i>276 (121-414)</i> | <i>142 (40-668)</i> |
| Variable flows | | |
| Architectural Paint: In Use | 2•10 ⁻⁵ (10 ⁻⁵ - 9•10 ⁻⁵) | 3 (1-6.5) |
| Municipal landfills | N/A | 1.7 (1.3-2.3) |
| Human body burden | 0.06 | 6 |
| Sludge drying beds | 0.2 | 50 (46-54) |
| <i>Subtotal: Variable flows</i> | <i>0.2</i> | <i>61 (54-69)</i> |
| Total | 276 (144-418) | 203 (93-736) |

555 Table 3. Comparison between results from this study to population-weighted emissions for
 556 Chicago calculated using the approach of Breivik et al. (2011) and prior urban estimate for
 557 Toronto, Ontario. from Diamond et al. (2010).

| | Applying Breivik's (2001) methods to Chicago | Toronto | This study: Chicago |
|---|---|---|---------------------------------------|
| Estimated ΣPCB stock | 2,200 tonnes | 437 tonnes ²¹ (282-796) | 276 tonnes (144-418) |
| Estimated ΣPCB emissions | -- | 230 kg year ⁻¹²³ (40-480) | 203 kg year ⁻¹ (93-736) |

558

559

Figure 1. PCB stock estimates and spatial surrogates: a. City of Chicago zoning for manufacturing (pink) and open space (green); Locations of PCBs point sources indicated for transformers (blue) and sludge drying facilities (teal); b. Spatial distribution of Σ PCBs contained in Chicago's PCB stocks (excluding municipal landfills); c. Chicago PCBs allocated by population, following the methods of Breivik et al. (2001).


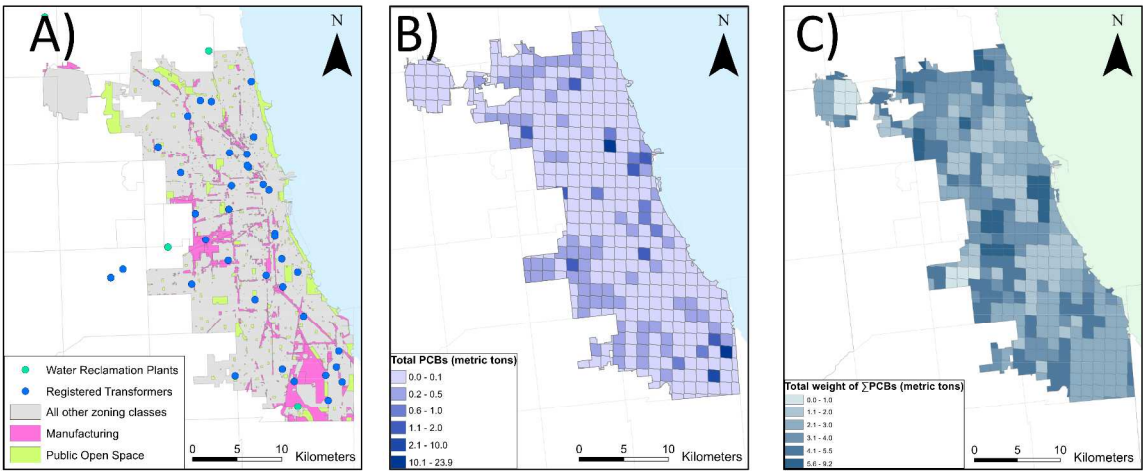


Figure 12. Spatial distribution of estimated annual PCB emissions (g year^{-1}): a. Annual Σ PCB emissions from all sources; b. Estimated annual PCB 11 emissions from architectural paint.

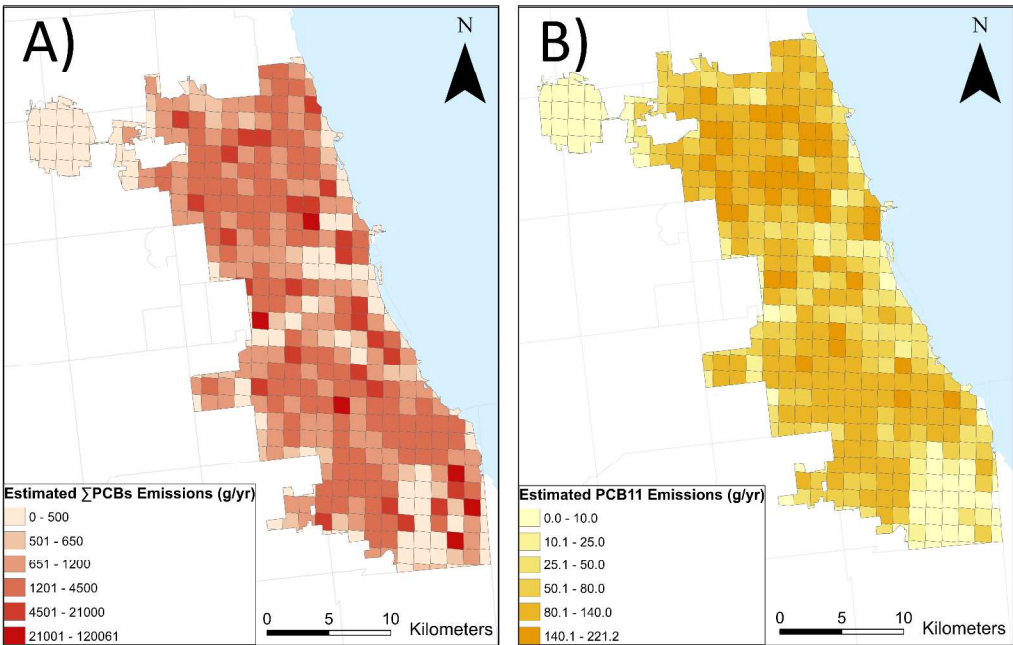

Literature Cited

1. Erickson, M. D.; Kaley, R. G., Applications of polychlorinated biphenyls. *Environ Sci Pollut R* **2011**, *18*, (2), 135-151.
2. Agency for Toxic Substances and Disease Registry U.S. Department of Health and Human Services, P. H. S., Atlanta, GA, *Toxicological profile for polychlorinated biphenyls (PCBs)*. 2000.
3. Pessah, I. N., Non-Coplanar Environmental Chemicals: Implications for Autism Risk. *J Neurochem* **2009**, *108*, 32-33.
4. Simon, T.; Britt, J. K.; James, R. C., Development of a neurotoxic equivalence scheme of relative potency for assessing the risk of PCB mixtures. *Regulatory Toxicology and Pharmacology* **2007**, *48*, (2), 148-170.
5. Boas, M.; Feldt-Rasmussen, U.; Main, K. M., Thyroid effects of endocrine disrupting chemicals. *Molecular and Cellular Endocrinology* **2012**, *355*, (2), 240-248.
6. Lauby-Secretan, B.; Loomis, D.; Grosse, Y.; Ghissassi, F. E.; Bouvard, V.; Benbrahim-Tallaa, L.; Guha, N.; Baan, R.; Mattock, H.; Straif, K., Carcinogenicity of polychlorinated biphenyls and polybrominated biphenyls. *The Lancet Oncology* *14*, (4), 287-288.
7. Robertson, L. W.; Ludewig, G., Polychlorinated Biphenyl (PCB) carcinogenicity with special emphasis on airborne PCBs. *Gefahrstoffe, Reinhaltung der Luft = Air quality control / Herausgeber, BIA und KRdL im VDI und DIN* **2011**, *71*, (1-2), 25-32.
8. Hornbuckle, K. C.; Carlson, D. L.; Swackhamer, D. L.; Baker, J. E.; Eisenreich, S. J., Polychlorinated biphenyls in the Great Lakes. In *Persistent Organic Pollutants in the Great Lakes*, Springer Berlin Heidelberg: 2006; pp 13-70.
9. Harrad, S.; Hazrati, S.; Ibarra, C., Concentrations of Polychlorinated Biphenyls in Indoor Air and Polybrominated Diphenyl Ethers in Indoor Air and Dust in Birmingham, United Kingdom: Implications for Human Exposure. *Environmental Science & Technology* **2006**, *40*, (15), 4633-4638.
10. Ampleman, M. D.; Martinez, A.; DeWall, J.; Rawn, D. F. K.; Hornbuckle, K. C.; Thorne, P. S., Inhalation and Dietary Exposure to PCBs in Urban and Rural Cohorts via Congener-Specific Measurements. *Environmental Science & Technology* **2015**, *49*, (2), 1156-1164.
11. Meyer, H. W.; Frederiksen, M.; Göen, T.; Ebbenhøj, N. E.; Gunnarsen, L.; Brauer, C.; Kolarik, B.; Müller, J.; Jacobsen, P., Plasma polychlorinated biphenyls in residents of 91 PCB-contaminated and 108 non-contaminated dwellings—An exposure study. *International Journal of Hygiene and Environmental Health* **2013**, *216*, (6), 755-762.
12. Norström, K.; Czub, G.; McLachlan, M. S.; Hu, D.; Thorne, P. S.; Hornbuckle, K. C., External exposure and bioaccumulation of PCBs in humans living in a contaminated urban environment. *Environment International* **2010**, *36*, (8), 855-861.
13. Streets, D. G.; Bond, T. C.; Carmichael, G. R.; Fernandes, S. D.; Fu, Q.; He, D.; Klimont, Z.; Nelson, S. M.; Tsai, N. Y.; Wang, M. Q.; Woo, J. H.; Yarber, K. F., An inventory of gaseous and primary aerosol emissions in Asia in the year 2000. *Journal of Geophysical Research: Atmospheres* **2003**, *108*, (D21), n/a-n/a.
14. Kuhns, H.; Knipping, E. M.; Vukovich, J. M., Development of a United States–Mexico Emissions Inventory for the Big Bend Regional Aerosol and Visibility Observational (BRAVO) Study. *Journal of the Air & Waste Management Association* **2005**, *55*, (5), 677-692.
15. Alonso, M. F.; Longo, K. M.; Freitas, S. R.; Mello da Fonseca, R.; Marécal, V.; Pirre, M.; Klenner, L. G., An urban emissions inventory for South America and its application in

- 615 numerical modeling of atmospheric chemical composition at local and regional scales. *Atmos.*
616 *Environ.* **2010**, *44*, (39), 5072-5083.
- 617 16. Otte, T. L.; Pouliot, G.; Pleim, J. E.; Young, J. O.; Schere, K. L.; Wong, D. C.; Lee, P. C.
618 S.; Tsidulko, M.; McQueen, J. T.; Davidson, P.; Mathur, R.; Chuang, H.-Y.; DiMego, G.;
619 Seaman, N. L., Linking the Eta Model with the Community Multiscale Air Quality (CMAQ)
620 Modeling System to Build a National Air Quality Forecasting System. *Weather and Forecasting*
621 **2005**, *20*, (3), 367-384.
- 622 17. Gasic, B.; Moeckel, C.; MacLeod, M.; Brunner, J.; Scheringer, M.; Jones, K. C.;
623 Hungerbühler, K., Measuring and Modeling Short-Term Variability of PCBs in Air and
624 Characterization of Urban Source Strength in Zurich, Switzerland. *Environmental Science &*
625 *Technology* **2009**, *43*, (3), 769-776.
- 626 18. Diefenbacher, P. S.; Bogdal, C.; Gerecke, A. C.; Glüge, J.; Schmid, P.; Scheringer, M.;
627 Hungerbühler, K., Emissions of Polychlorinated Biphenyls in Switzerland: A Combination of
628 Long-Term Measurements and Modeling. *Environmental Science & Technology* **2015**, *49*, (4),
629 2199-2206.
- 630 19. Bogdal, C.; Müller, C. E.; Buser, A. M.; Wang, Z.; Scheringer, M.; Gerecke, A. C.;
631 Schmid, P.; Zennegg, M.; MacLeod, M.; Hungerbühler, K., Emissions of Polychlorinated
632 Biphenyls, Polychlorinated Dibenzo-p-dioxins, and Polychlorinated Dibenzofurans during 2010
633 and 2011 in Zurich, Switzerland. *Environmental Science & Technology* **2014**, *48*, (1), 482-490.
- 634 20. Totten, L. A.; Stenchikov, G.; Gigliotti, C. L.; Lahoti, N.; Eisenreich, S. J., Measurement
635 and modeling of urban atmospheric PCB concentrations on a small (8 km) spatial scale.
636 *Atmospheric Environment* **2006**, *40*, (40), 7940-7952.
- 637 21. Diamond, M. L.; Melymuk, L.; Csiszar, S. A.; Robson, M., Estimation of PCB Stocks,
638 Emissions, and Urban Fate: Will our Policies Reduce Concentrations and Exposure?
639 *Environmental Science & Technology* **2010**, *44*, (8), 2777-2783.
- 640 22. Melymuk, L.; Robson, M.; Helm, P. A.; Diamond, M. L., Application of Land Use
641 Regression to Identify Sources and Assess Spatial Variation in Urban SVOC Concentrations.
642 *Environmental Science & Technology* **2013**, *47*, (4), 1887-1895.
- 643 23. Csiszar, S. A.; Diamond, M. L.; Daggupaty, S. M., The Magnitude and Spatial Range of
644 Current-Use Urban PCB and PBDE Emissions Estimated Using a Coupled Multimedia and Air
645 Transport Model. *Environmental Science & Technology* **2014**, *48*, (2), 1075-1083.
- 646 24. Robson, M.; Melymuk, L.; Csiszar, S. A.; Giang, A.; Diamond, M. L.; Helm, P. A.,
647 Continuing sources of PCBs: The significance of building sealants. *Environment International*
648 **2010**, *36*, (6), 506-513.
- 649 25. Sun, P.; Ilora; Basu; Blanchard, P.; Brice, K. A.; Hites, R. A., Temporal and spatial
650 trends of atmospheric polychlorinated biphenyl concentrations near the Great Lakes.
651 *Environmental Science & Technology* **2007**, *41*, (4), 1131-1136.
- 652 26. Sun, P.; Basu, I.; Hites, R. A., Temporal trends of polychlorinated biphenyls in
653 precipitation and air at Chicago. *Environmental Science & Technology* **2006**, *40*, (4), 1178-1183.
- 654 27. Hu, D.; Lehmler, H.-J.; Martinez, A.; Wang, K.; Hornbuckle, K. C., Atmospheric PCB
655 congeners across Chicago. *Atmospheric Environment* **2010**, *44*, (12), 1550-1557.
- 656 28. Hu, D.; Martinez, A.; Hornbuckle, K. C., Discovery of non-Aroclor PCB (3, 3'-
657 dichlorobiphenyl) in Chicago air. *Environmental science & technology* **2008**, *42*, (21), 7873-
658 7877.

29. Hsu, Y. K.; Holsen, T. M.; Hopke, P. K., Locating and quantifying PCB sources in Chicago: Receptor modeling and field sampling. *Environmental Science & Technology* **2003**, *37*, (4), 681-690.
30. Soonthornnonda, P.; Zou, Y. H.; Christensen, E. R.; Li, A., PCBs in Great Lakes sediments, determined by positive matrix factorization. *Journal of Great Lakes Research* **2011**, *37*, (1), 54-63.
31. Metropolitan Water Reclamation District of Greater Chicago Monitoring and Research Department *Ambient Water Quality Monitoring in the Chicago, Calumet, and Des Plaines River Systems: A Summary of Biological, Habitat, and Sediment Quality During 2006*; Report No. 09-76 2009.
32. Rodenburg, L. A.; Meng, Q. Y., Source Apportionment of Polychlorinated Biphenyls in Chicago Air from 1996 to 2007. *Environmental Science & Technology* **2013**, *47*, (8), 3774-3780.
33. Hu, D.; Hornbuckle, K. C., Inadvertent Polychlorinated Biphenyls in Commercial Paint Pigments†. *Environmental science & technology* **2009**, *44*, (8), 2822-2827.
34. Rodenburg, L. A.; Guo, J.; Du, S. Y.; Cavallo, G. J., Evidence for Unique and Ubiquitous Environmental Sources of 3,3'-Dichlorobiphenyl (PCB 11). *Environmental Science & Technology* **2010**, *44*, (8), 2816-2821.
35. Inc., V. *Microeconomic Impacts of the Proposed 'PCB Ban Regulations; Final Task Report* EPA 560/6-77-035; U.S. Environmental Protection Agency, Office of Pesticide and Toxic Substances,; Washington, DC, 1978.
36. Ishikawa, Y.; Noma, Y.; Mori, Y.; Sakai, S.-i., Congener profiles of PCB and a proposed new set of indicator congeners. *Chemosphere* **2007**, *67*, (9), 1838-1851.
37. Clark, D. B., A.; Drennan, J.; Pedersen, E.; Peterson, N.; Vernon, Z.; Greene, R.; Bocka, R.; Engleman, N.; Lippold, C.; Nowinski, A. *2010 Land Use Inventory for Northeastern Illinois, Version 1.0*; Chicago Metropolitan Agency for Planning: 2014.
38. Herrick, R. F.; McClean, M. D.; Meeker, J. D.; Baxter, L. K.; Weymouth, G. A., An unrecognized source of PCB contamination in schools and other buildings. *Environmental Health Perspectives* **2004**, *112*, (10), 1051-1053.
39. U.S. Environmental Protection Agency *PCB Transformer Registration Database*; 2011.
40. Erdal, S.; Berman, L.; Hryhorczuk, D. O., Multimedia emissions inventory of polychlorinated Biphenyls for the US great lakes states. *Journal of the Air & Waste Management Association* **2008**, *58*, (8), 1022-1032.
41. Meijer, S. N.; Ockenden, W. A.; Sweetman, A.; Breivik, K.; Grimalt, J. O.; Jones, K. C., Global distribution and budget of PCBs and HCB in background surface soils: Implications or sources and environmental processes. *Environmental Science & Technology* **2003**, *37*, (4), 667-672.
42. Martinez, A.; Erdman, N. R.; Rodenburg, Z. L.; Eastling, P. M.; Hornbuckle, K. C., Spatial distribution of chlordanes and PCB congeners in soil in Cedar Rapids, Iowa, USA. *Environmental Pollution* **2012**, *161*, 222-228.
43. City of Chicago Zoning and Land Use Ordinance, C. T. o. t. M. C. o. C., and Zoning & Land Use-Related Tables and Indexes, Current through Council Journal of March 5, 2014 (became effective 2004); .
44. Craul, P. J., *Urban soil in landscape design*. John Wiley & Sons: 1992.
45. City of Chicago, I. a. K., McKenna and Associates Inc., *Sanitary Drainage and Ship Canal Tax Increment Redevelopment Area: Redevelopment Plan and Project*,; April 1991.

- 704 46. National Park Service U.S. Dept of the Interior *Historic American Engineering Record,*
705 *Chicago Sanitary and Ship Canal*; HAER No. IL-197.
- 706 47. Illinois Department of Natural Resources *Illinois Coastal Management Program Issue*
707 *Paper: Chicago River and North Shore Channel Corridors*; 2009.
- 708 48. Peverly, A. A.; O'Sullivan, C.; Liu, L.-Y.; Venier, M.; Martinez, A.; Hornbuckle, K. C.;
709 Hites, R. A., Chicago's Sanitary and Ship Canal sediment: Polycyclic aromatic hydrocarbons,
710 polychlorinated biphenyls, brominated flame retardants, and organophosphate esters.
711 *Chemosphere* **2015**, *134*, (0), 380-386.
- 712 49. Martinez, A.; Norström, K.; Wang, K.; Hornbuckle, K. C., Polychlorinated biphenyls in
713 the surficial sediment of Indiana Harbor and Ship Canal, Lake Michigan. *Environment*
714 *international* **2010**, *36*, (8), 849-854.
- 715 50. Dorkin, J., Ross, P., Henebry, M.S, Miller, J., and M. Wetzel *Biological and*
716 *toxicological investigations of Chicago Area navigation projects," contract report to USACE,*
717 *Chicago District by Illinois Natural History Survey, Champaign, Illinois.*; Report to USACE
718 Chicago District by Illinois Natural History Survey: Champaign, Illinois, 1989.
- 719 51. Miller, J. A. *Confined Disposal Facilities on the Great Lakes*; U.S. Army Corps of
720 Engineers, Great Lakes & Ohio River Division: Chicago IL, 1998; p 22.
- 721 52. Yi, S. M.; Pagilla, S. R.; Seo, Y. C.; Mills, W. J.; Holsen, T. M., Emissions of
722 polychlorinated biphenyls (PCBs) from sludge drying beds to the atmosphere in Chicago.
723 *Chemosphere* **2008**, *71*, (6), 1028-1034.
- 724 53. Webber, M. D.; Pietz, R. I.; Granato, T. C.; Svoboda, M. L., Plant Uptake of PCBs and
725 Other Organic Contaminants from Sludge-Treated Coal Refuse. *J Environ Qual* **1994**, *23*, (5),
726 1019-1026.
- 727 54. Monitoring and Research Department, A. B. M. R. f. Report No. 13-2; Metropolitan
728 Water Reclamation District of Greater Chicago: Chicago, IL, February 2013.
- 729 55. Humphrey, H. E. B.; Gardiner, J. C.; Pandya, J. R.; Sweeney, A. M.; Gasior, D. M.;
730 McCaffrey, R. J.; Schantz, S. L., PCB congener profile in the serum of humans consuming Great
731 Lakes fish. *Environmental Health Perspectives* **2000**, *108*, (2), 167-172.
- 732 56. Pham, T. T.; Proulx, S., PCBs and PAHs in the Montreal urban community (Quebec,
733 Canada) wastewater treatment plant and in the effluent plume in the St Lawrence river. *Water*
734 *Research* **1997**, *31*, (8), 1887-1896.
- 735 57. Murphy, T. J.; Formanski, L. J.; Brownawell, B.; Meyer, J. A., Polychlorinated biphenyl
736 emissions to the atmosphere in the Great Lakes region. Municipal landfills and incinerators.
737 *Environmental Science & Technology* **1985**, *19*, (10), 942-946.
- 738 58. Murphy, T. J.; Formanski, L. J.; Brownawell, B.; Meyer, J. A., Polychlorinated Biphenyl
739 Emissions to the Atmosphere in the Great-Lakes Region - Municipal Landfills and Incinerators.
740 *Environmental Science & Technology* **1985**, *19*, (10), 942-946.
- 741 59. United States Environmental Protection Agency *Use Authorization for, and Distribution*
742 *in Commerce of, Non-liquid Polychlorinated Biphenyls; Notice of Availability; Partial*
743 *Reopening of Comment Period. Fed. Regist.*, 1999, *64*, 237, 69358 – 69364.
- 744 60. United States Census Bureau *Paint and Allied 2010 Products Current Industrial Report.*
745 *Issued July 2011.*
- 746 61. US Census Bureau *2007 Economic Census, 2007 Survey of Business Owners, and 2011*
747 *County Business Patterns.*

62. Acmite Market Intelligence *Market Report: World Pigment Market Markets, Products, Applications, Innovations, Changes and risks, Competition, Prospects to 2018, Volumes 1&2*; Ratingen, Germany, 2010.
63. Norstrom, K.; Czub, G.; McLachlan, M. S.; Hu, D. F.; Thorne, P. S.; Hornbuckle, K. C., External exposure and bioaccumulation of PCBs in humans living in a contaminated urban environment. *Environ Int* **2010**, *36*, (8), 855-861.
64. Czub, G.; McLachlan, M. S., A food chain model to predict the levels of lipophilic organic contaminants in humans. *Environmental Toxicology and Chemistry* **2004**, *23*, (10), 2356-2366.
65. Diamond, M. L.; Priemer, D. A.; Law, N. L., Developing a multimedia model of chemical dynamics in an urban area. *Chemosphere* **2001**, *44*, (7), 1655-1667.
66. Survey, U. S. G. National Water Information System: USGS Water Data for the Nation. <http://waterdata.usgs.gov/>
67. Petrich, N. T.; Spak, S. N.; Carmichael, G. R.; Hu, D.; Martinez, A.; Hornbuckle, K. C., Simulating and Explaining Passive Air Sampling Rates for Semivolatile Compounds on Polyurethane Foam Passive Samplers. *Environmental Science & Technology* **2013**, *47*, (15), 8591-8598.
68. Colten, C. E. *Industrial Wastes in the Calumet Area, 1869-1970: A Historical Geography*; Waste Management and Research Center, Illinois State Museum: Sept 1985.
69. Persoon, C.; Peters, T. M.; Kumar, N.; Hornbuckle, K. C., Spatial Distribution of Airborne Polychlorinated Biphenyls in Cleveland, Ohio and Chicago, Illinois†. *Environmental science & technology* **2009**, *44*, (8), 2797-2802.
70. U.S. Census Bureau 2010.
71. Csiszar, S. A.; Daggupaty, S. M.; Verkoeyen, S.; Giang, A.; Diamond, M. L., SO-MUM: A Coupled Atmospheric Transport and Multimedia Model Used to Predict Intraurban-Scale PCB and PBDE Emissions and Fate. *Environmental Science & Technology* **2013**, *47*, (1), 436-445.
72. Du, S. Y.; Rodenburg, L. A., Source identification of atmospheric PCBs in Philadelphia/Camden using positive matrix factorization followed by the potential source contribution function. *Atmospheric Environment* **2007**, *41*, (38), 8596-8608.
73. Khairy, M.; Muir, D.; Teixeira, C.; Lohmann, R., Spatial Distribution, Air–Water Fugacity Ratios and Source Apportionment of Polychlorinated Biphenyls in the Lower Great Lakes Basin. *Environmental Science & Technology* **2015**.
74. Wethington, D. M.; Hornbuckle, K. C., Milwaukee, WI, as a source of atmospheric PCBs to Lake Michigan. *Environmental science & technology* **2005**, *39*, (1), 57-63.
75. Zhang, X.; Rygwelski, K. R.; Rossmann, R., The Lake Michigan contaminant transport and fate model, LM2-toxic: Development, overview, and application. *Journal of Great Lakes Research* **2009**, *35*, (1), 128-136.
76. Thomsen, M.; Nielsen, O-K., & Illerup, J. B. *Unintentional formation and emission of the persistent organic pollutants HCB and PCBs in the Nordic countries: Documentation of existing information regarding sources and emissions to air, water and soil, with focus on reporting obligations according to the Stockholm Convention, the UNECE POP protocol, and PRTR registers*; Nordic Council of Ministers: 2009; p 139.
77. Nollet, H.; Roels, M.; Lutgen, P.; Van der Meeren, P.; Verstraete, W., Removal of PCBs from wastewater using fly ash. *Chemosphere* **2003**, *53*, (6), 655-665.
78. Meggo, R. E.; Schnoor, J. L., Cleaning Polychlorinated Biphenyl (PCB) Contaminated Garden Soil by Phytoremediation. *Environmental sciences* **2013**, *1*, (1), 33-52.

- 794 79. Smith, K. E.; Schwab, A. R.; Banks, M. K., Phytoremediation of polychlorinated
795 biphenyl (PCB)-contaminated sediment: A greenhouse feasibility study. *J Environ Qual* **2007**,
796 36, (1), 239-244.
- 797 80. Van Aken, B.; Correa, P. A.; Schnoor, J. L., Phytoremediation of Polychlorinated
798 Biphenyls: New Trends and Promises. *Environmental Science & Technology* **2010**, 44, (8),
799 2767-2776.
- 800 81. Meggo, R. E.; Schnoor, J. L., Rhizosphere redox cycling and implications for rhizosphere
801 biotransformation of selected polychlorinated biphenyl (PCB) congeners. *Ecol Eng* **2013**, 57,
802 285-292.
- 803 82. Meggo, R. E.; Schnoor, J. L.; Hu, D. F., Dechlorination of PCBs in the rhizosphere of
804 switchgrass and poplar. *Environmental Pollution* **2013**, 178, 312-321.
- 805 83. Chekol, T.; Vough, L. R.; Chaney, R. L., Phytoremediation of polychlorinated biphenyl-
806 contaminated soils: the rhizosphere effect. *Environment International* **2004**, 30, (6), 799-804.
- 807 84. Ferguson, P. J.; Bernot, M. J.; Doll, J. C.; Lauer, T. E., Detection of pharmaceuticals and
808 personal care products (PPCPs) in near-shore habitats of southern Lake Michigan. *Sci Total*
809 *Environ* **2013**, 458, 187-196.
- 810 85. Assistance, C. o. F. D. 66.701 Toxic Substances Compliance Monitoring Cooperative
811 Agreements.
812 <https://www.cFDA.gov/?s=program&mode=form&tab=step1&id=e8893614c75ecdf1c03c663467c4ac6a>.
- 813 86. Swinkels, F. C., E.; Janse, J. *EuroPCB: inventory PCB enforcement in member states*,
814 *Part I*. ; European Union Chemical Legislation European Enforcement Network: 2005.

815

